



## Sediment Strainers

### Standard Features (Sizes 1/2" - 4")

- True union design facilitates installation or repair without expanding the pipeline
- Large filtration capacities and low pressure drops
- Transparent PVC strainer body permits easy evaluation of filter screen's condition
- Complete thermoplastic construction
- Pressure rating: 1/2" - 2", 150psi; 3" and 4", 85psi
- Sizes 1/2" - 2" supplied with two sets of end connectors (socket and threaded)

### Options

- FKM seals for corrosive media
- Stainless steel 316 screens available in 20, 40 and 60 mesh
- In line cleaning (clean out valve)

### Tips on Sediment Strainers

- Clean screen regularly.
- Union nut of screening section can be removed for quick and easy maintenance (no need to remove body from pipeline).
- Sediment strainers protect pipeline's important and costly components, such as pumps and meters, by removing suspended particles and impurities.
- Filtering section must face downward when installed.
- You must identify flow direction, shown by molded arrow on the body, before installation.

### Specifications

**Sizes:** 1/2" - 4"  
**Models:** Socket, Threaded, Flanged (ANSI)  
**Body:** PVC  
**Screens:** Standard: 20 mesh PVC  
 Optional: PVC - 30 and 40 mesh  
 Stainless Steel - 20, 40 and 60 mesh

**Seals:** EPDM, FKM

**Sizes 1/2" - 4" PVC/EPDM/FKM  
 Models NSF-61 Certified**


### Parts List (Sizes 1/2" - 4")

PARTS			
NO.	DESCRIPTION	PCS.	MATERIAL
1	Body	1	PVC
2	Filter Screen	1	PVC, Stainless Steel 316
3	Screen Support	1	PVC
4	End Connector	2	PVC
5	Union Nut	3	PVC
6	Retaining Ring	1	PVC
7	Split Ring	1	PVC
8	O-Ring (A)	1	EPDM, FKM, Others
9	O-Ring (B)	2	EPDM, FKM, Others
10	Stop Ring	2	PVDF **


\*\* Used for flanged end

### Sample Specification

All true union sediment strainers, sizes 1/2" - 4", shall be of true union design and shall be constructed of transparent PVC. All O-rings shall be EPDM or FKM. Screens shall be 20, 30 and 40 mesh PVC or 20, 40 and 60 mesh 316 stainless steel. Filter maintenance is achieved without removing strainer from the pipeline. PVC shall conform to ASTM D1784 Cell Classification 12454-A. Valves shall be rated to 150psi sizes 1/2" through 2" and 85psi sizes 3" and 4" at 70° F, as manufactured by Asahi/America, Inc.

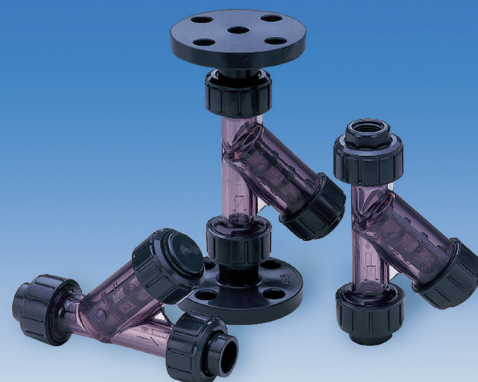

# Sediment Strainers

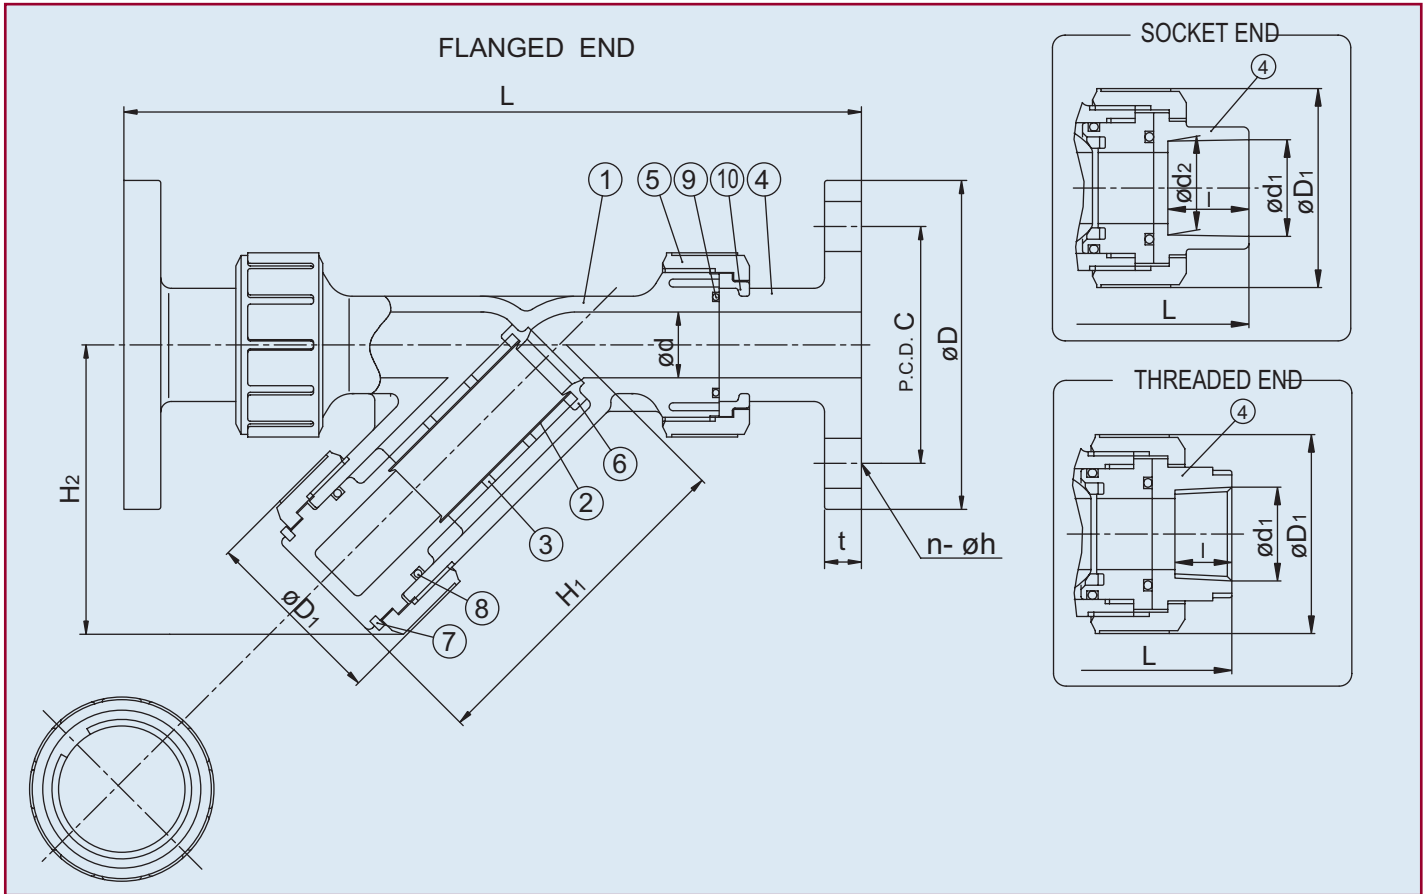

## Dimensions (Sizes 1/2" - 4") (in.)

NOMINAL SIZE		FLANGED						SOCKET				THREADED			d	D1	H1	H2
		ANSI CLASS 150						ASTM CLASS 40				d1	l	L				
INCHES	mm	D	C	n	h	L	t	d1	d2	l	L				d1	l	L	
1/2	15	3.50	2.38	1	0.62	8.11	0.47	0.848	0.836	0.87	6.93	1/2 - 14 NPT	0.59	6.50	0.59	1.89	3.82	3.07
3/4	20	3.88	2.75	1	0.62	10.00	0.55	1.058	1.046	1.00	8.30	3/4 - 14 NPT	0.67	7.95	0.79	2.36	4.72	3.86
1	25	4.25	3.12	1	0.62	11.02	0.55	1.325	1.310	1.12	9.37	1 - 11-1/2 NPT	0.79	8.82	0.98	2.76	5.24	4.37
1-1/4	32	-	-	-	-	-	-	1.670	1.655	0.94	11.28	1 1/4 - 11-1/2 NPT	0.87	11.30	1.57	3.94	6.97	5.87
1-1/2	40	5.00	3.88	1	0.62	13.23	0.63	1.912	1.894	1.38	12.13	1 1/2 - 11-1/2 NPT	0.98	11.30	1.57	3.94	6.97	5.87
2	50	6.00	4.75	1	0.75	14.20	0.63	2.387	2.369	1.50	13.31	2 - 11-1/2 NPT	1.10	12.76	2.07	4.17	7.48	6.29
3	80	7.50	6.00	1	0.75	18.78	0.71	3.516	3.492	1.87	17.83	3 - 8 NPT	1.38	17.17	3.07	5.98	10.67	9.21
4	100	9.00	7.50	8	0.75	23.94	0.71	4.518	4.491	2.25	23.54	4 - 8 NPT	1.77	23.47	3.94	8.27	14.21	12.44

## Weight (lbs.)

NOMINAL SIZE		SOCKET THREADED	FLANGED
INCHES	mm		
1/2	15	0.66	1.10
3/4	20	1.32	2.20
1	25	1.76	3.31
1-1/2	40	4.41	5.51
2	50	5.51	8.82
3	80	15.43	18.74
4	100	40.78	45.19

## Cv Values

NOMINAL SIZE		Cv
INCHES	mm	
1/2	15	5.2
3/4	20	7.5
1	25	14
1-1/2	40	34
2	50	50
3	80	110
4	100	165

## Filter Screen Sizes\*

MESH (HOLES PER LINEAR INCH)	20	30	40
MAXIMUM PARTICLE SIZE (INCH)	.0331	.0234	.0165
MICRON PARTICLE SIZE (µm)	840	595	420

\* For 60 mesh consult factory

## Caution

- Never remove strainer from pipeline under pressure.
- Always wear protective gloves and goggles.

# Sediment Strainer Drainer Kit



**Strainer Drain Kit**

Asahi/America Inc., introduces Sediment Strainer Drain Socket kits complete with Omni® Type-27 ball valves for quick and easy cleaning of sediment strainer screens without removing the screen support assembly. The ball valve can be opened to purge the screen area of waste and debris. Valve is supplied loose for piping waste pipe to desired location.

## Standard Features (Sizes 1/2" - 4")

- Kits available for 1/2" - 2" PVC Sediment Strainers
- 1/2" & 3/4" strainers use 1/2" socket Omni® Type-27  
1" - 2" strainers use 1" socket Omni® Type-27
- Supplied as a kit, includes new screen support housing, split ring, union nut, end connector and PVC EPDM socket Omni® Type-27 ball valve  
PVC SCH80 pipe not supplied

## Parts List (Sizes 1/2" - 4")

PARTS	
NO.	DESCRIPTION
5	Union Nut
6	Retaining ring
9	O-ring (B)
12	Screen Support Type Drain
13	Drain Socket
14	O-Ring (D)

Sediment Strainer sold separately

